

INSTANT CONNECT WATER HEATER

Engineered to ensure consistent water pressure

- Direct connection for consistent pressure maintenance
- Multi-outlet capability to support multiple bathrooms
- ¾ inch for each outlet and 1 inch for the inlet
- 2000-watt heating element power
- Available in corrosion-resistant copper or porcelain-coated tanks
- Available in two capacities: 16-gallon in horizontal or vertical, and 12-gallon in vertical
- For systems with a pressure pump, an 8-bar heater is recommended; without it, a 4-bar heater is suitable
- Equipped with a cleaning port
- Available in both horizontal and vertical designs based on the clients requirements

Triple Safety Features


1. Thermostat for temperature control
2. Automatic cutoff if the temperature exceeds 90°C
3. Pressure relief in case of overpressure

Warranty


- 5 years for porcelain-coated heaters
- 10 years for copper heaters
- Warranty does not cover heating elements
- Proper pressure maintenance is required

Made in Kuwait with with factory warranty

Type	16 Gallon			12 Gallon	
corrosion-resistant copper	Pressure	Horizontal	Vertical	Pressure	Vertical
	4-bar	KD 100		4-bar	KD 90
	8-bar	KD 120		8-bar	KD 100
porcelain-coated	Pressure	Horizontal	Vertical	Pressure	Vertical
	8-bar	KD 54		8-bar	KD 50




DIRECT SALE  **1844555**

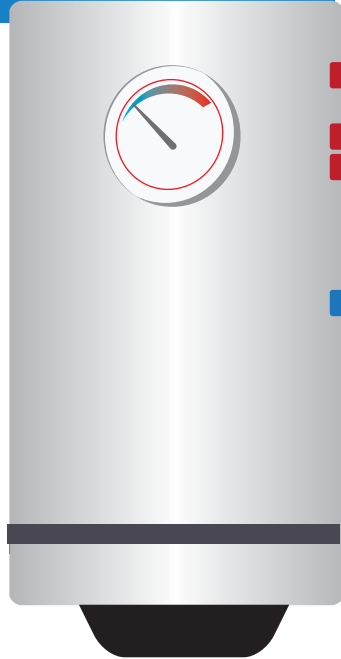

Option
1

Ventilation to the roof

Outlet for another
bathroom


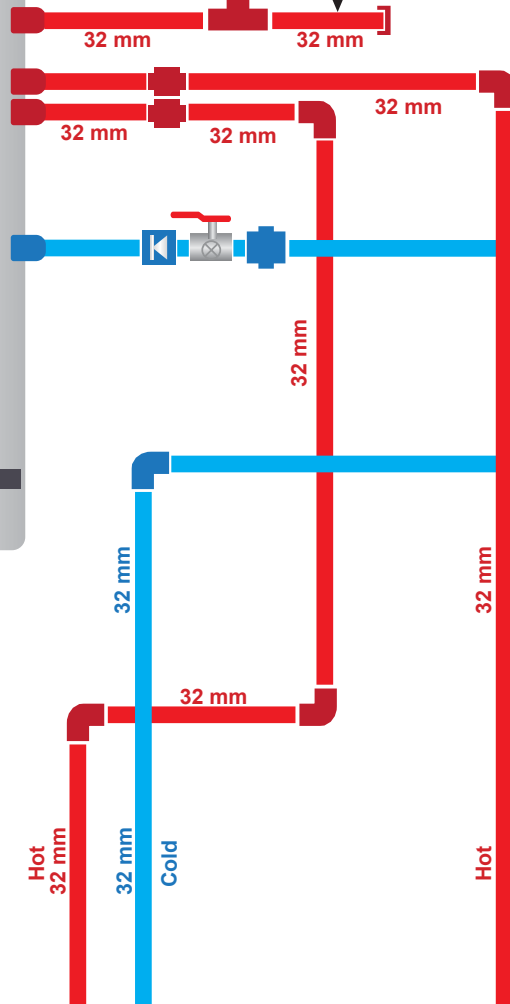


Option
2


Air vent valve

Outlet for another bathroom

Pressure relief valve
without a check valve core

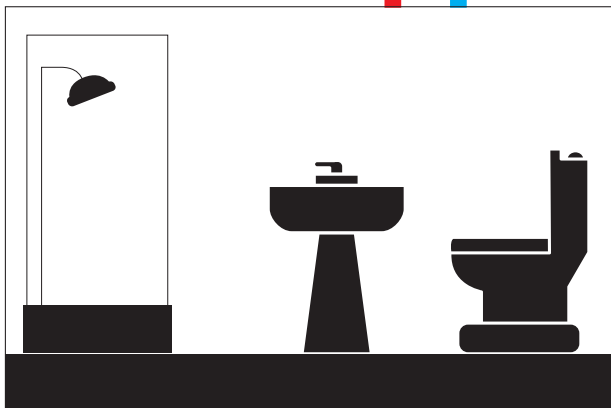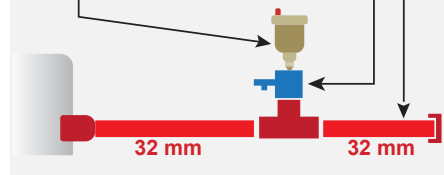

Bathroom 2

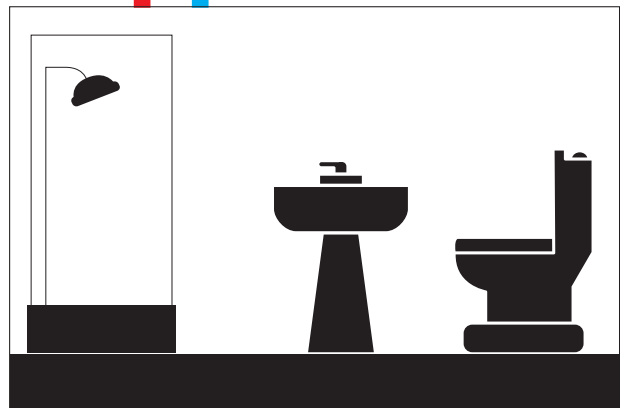

Bathroom 1